



MODEL	REV	PRODUCTION TRANSFER DATA		작성일	작성	검토	승인
DB950	1.3	PROCESS NAME	F/W UPDATE	2021-05-09	BH.Y		

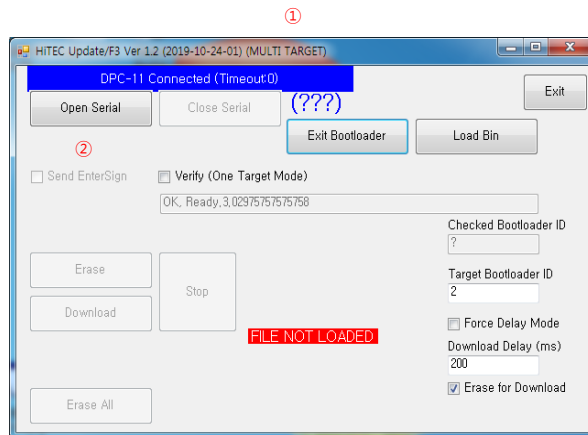

- ①. Run ST32_Update - RB950 - 2019-10-24-01.exe
 - *. Other screens may be displayed intermittently.
- ②. Click Open Serial button. Once connected, "Read" will be displayed.
- ③. Check Verify (One Target Mode). "Enter Bootloader" will be activated.
- ④. Click "Enter Bootloader". Once input the power on DPC-11, "Check" will be activated.
- ⑤. Click "Check" button, Checked Bootloader ID "65550" will be shown. --> if other value is displayed : Error
- ⑥. Input "65550" ID on Target Bootloader ID
- ⑦. Mark Force Delay Mode checkbox, and input "120" on Download Delay(ms)
 - *. Mark Erase for Download checkbox
- ⑧. Click Load Bin. Load "Update file name.xhy"
 - *. "Download" will be activated
- ⑨. Click "Download" button to proceed the update and a success message will be displayed.
 - *. ROM APP OK
 - ROM APP MATCHED

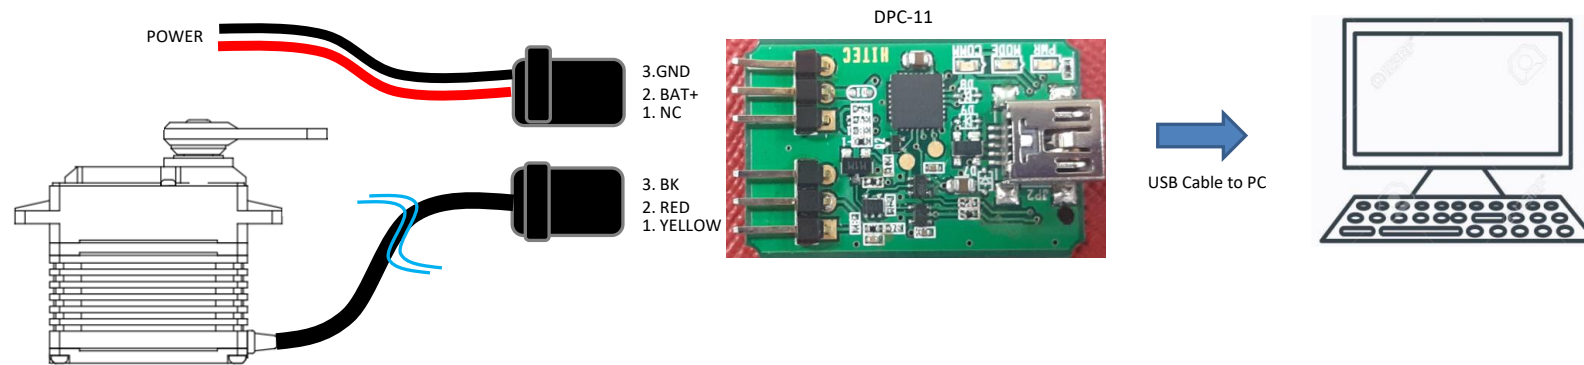